

Edge Technology is here!

- Can be operated using either standard chain drive or motorised technology.
- The durable standard chain drive is available in two ratio mechanism 1:1 and 1:1.75. The standard 1:1.75 ratio enables a heavier blind to be lifted without the need of a spring booster. But you can nominate to use the optional 1:1 ratio. It is also aesthetically pleasing in one size format for a consistent look throughout the home.
- Universal spring loaded idle ends provide for smooth and easy installation.
- The aluminium tube has been engineered to perform well with minimal deflection over large expanses.



Outer Beauty

Hardware components are available in four colour options – White, Black, Grey and Magnolia.

All brackets are universal in design which means the operating side can be changed simply on site if required. Two bracket sizes are available, 38mm and 55mm which ensures the correct bracket can be selected for challenging installations and maximises the drop capacity. Brackets are available with slim line end caps, which are recommended for all face fit installations.



Perth Eagle Blinds
Blinds | Flooring | Shutters

The Eagle Group of Companies

Unit 1/20 Prindiville Drive


Wangara 6065 WA

08 9309 2907

www.perthblinds.com

Luxaflex Window Fashions Edge Rollers

A revolutionary new sort of
Roller Blind

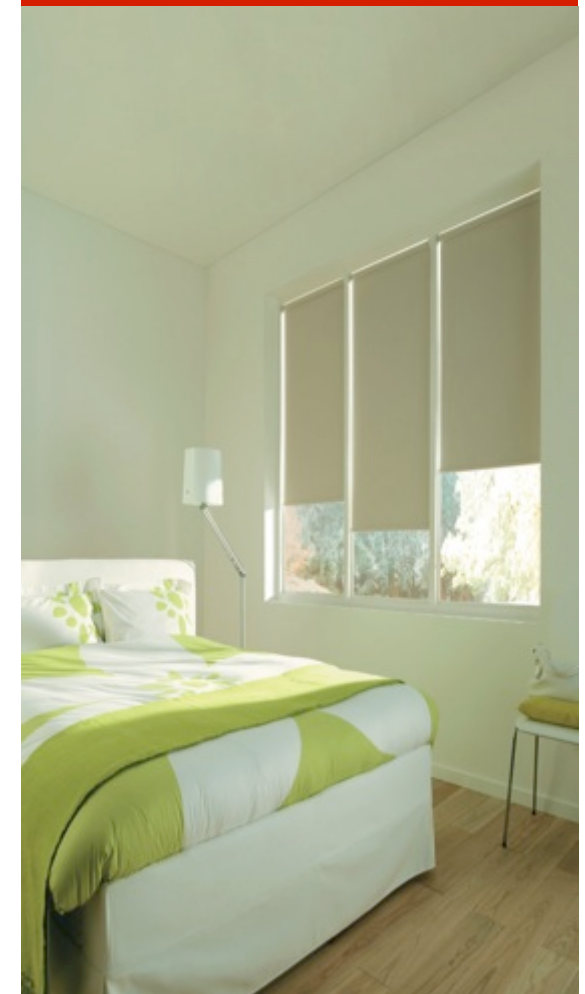

Quality is Guaranteed

We guarantee you will be so impressed by the quality of our Luxaflex Window Fashions Edge technology Roller Blinds, as Luxaflex only use the very best Australian mechanisms, brackets, roller tubes and Australian made fabrics.

Plus we have the largest fabric range in Perth. Our fitters are the best in the business and our team, know their stuff.

Perth Eagle Blinds has 30 years of experience providing only the best premium products & we always ensure you will receive the best quality available.

Living with Innovation

- Two compact dual bracket designs are available:
 - The standard (under) roll configuration ensures the blind skin can be fitted close to the window.
 - The reverse (over) roll configuration provides a self pelmet effect. Both dual brackets can be installed with either same side or opposite end controls and have universal mounting options.
- An optional patented integrated levelling device makes it easy to adjust shades after mounting.
- Two standard linking systems are available:
 - The standard connector set minimises the intermediate gap on linked configurations.
 - The optional aligner link maximises flexibility during installation with a fine adjustment option for aligning the level of the blinds.
- Both linking options have 15 degree play. This provides an allowance for slightly misaligned installations.
- An independent linking option is available for configurations that require multiple operation.
- A 45 and 90 degree linking mechanism is also available for bay and corner windows.
- A sleek (84mm projection) and contemporary head box and fascia system are available in both an anodised and powder coated finish (white, black or magnolia) with colour coded endcaps.
- Both the head box and fascia system can be installed in both reveal and face fit positions and have a snap lock cover and plastic outlets for easy installation and quiet operation.
- To obtain room darkening, the head box system can be installed with side channels, available in matching powder coated colours (white, black or magnolia) or anodised finish.



“Edge Technology blew my mind how cool it is when I first saw it, you are going to want to invest in this product for sure!”

Quoted by Paul Assinder Sale Director/Designer



Heavy Duty Features & Benefits

Two bracket sizes available – 55mm and 75mm which ensures the correct bracket can be selected to maximise the drop capacity. The aluminium tube has been engineered to perform well with minimal deflection over large expanses. Universal bracket system allows for simple installation. The idle end plug has a 30mm play to provide for incorrect measurements. Components are available in two colour options: black and white. Can link up to 3 blinds with 30m2 combined sq area. Straight linked blinds work smoothly up to an angle of 15 degrees to compensate for installation errors and allows for arches with a large radius to be installed without a universal joint.

Smooth & light operation

A range of durable hardware options are now available to span widths up to 3.8m and drops up to 5.5m with smooth and reliable operation every time. Chain operated rollers are now available with extended limitations to cater for longer drops, while motorisation has flourished with a wide selection of motor options. Now you can select from the most superior motorised solutions to link blinds up to 30m2 or simply motorise a single heavy duty blind with a simple affordable solution.

